


General

The Blayds 400A Primary Plug & Socket drawer connectors are manufactured and tested in accordance BG/T7251.1-2013 Low Voltage Switchgear and Control Equipment - Part 1.



Test report available upon request

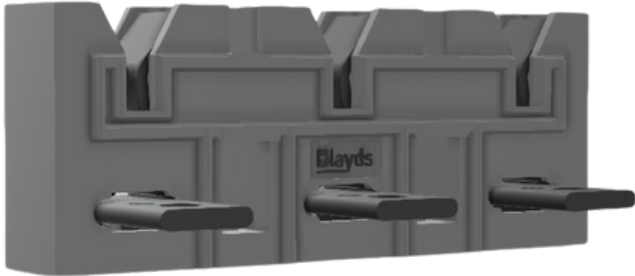

Technical

Parameters	Unit	Value
Rated Voltage	V	380(690 VAC)
Rated Frequency	HZ	50(60)
Rated Insulation Voltage	V	690(1000)
Rated Current	A	400
Rated short-term current (1 sec)	KA	15
Power Frequency withstand voltage (1 min)	KV	2.5
Combustability		FV-0
Long-term Heat Resistance (Temp Index)	°C	>155
Operating Temperature	°C	0 to +70

Plug

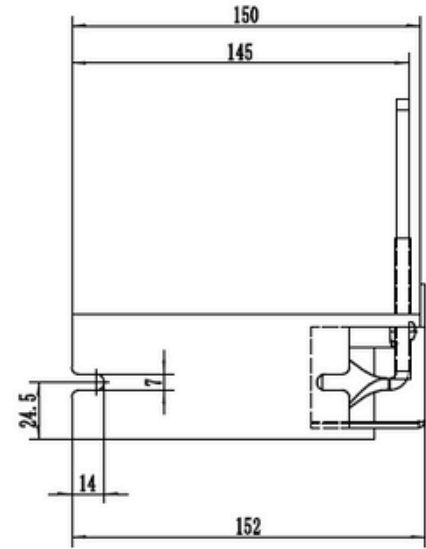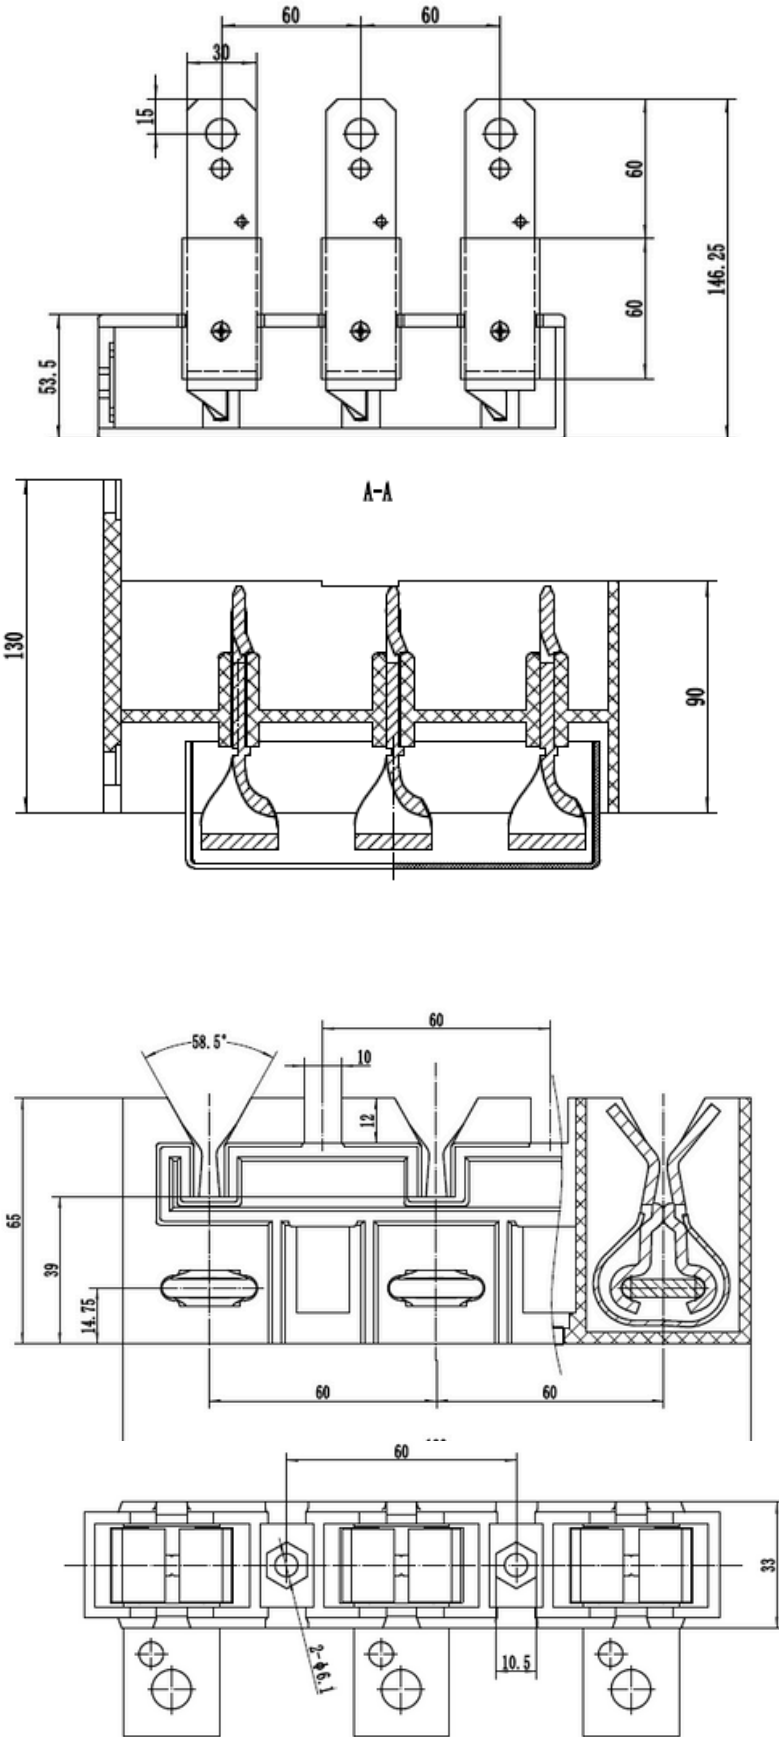

Socket

